

Information Sheet for MD630

MD630 Product Description

Complete unit mounted within a galvanised steel crash frame, with forklift pockets and lifting eyes. Incoming and outgoing hardwire connection to terminals (Outgoing socket options available).

Common internal and external copper earth bar with brass studs. External door interlocked incoming protection isolator handle. Assembled to IP65.

Features and Benefits:


- > Textured powder coated Zintec steel construction with phosphate welds
- > Separate incoming and outgoing compartments, each with internal protection shroud and external panel key lock door
- > Removable rain hood for common busbar access
- > Aluminium gland plate.

Popular Applications

Three-phase mains distribution board for use on any temporary electrical installation.



Technical Information

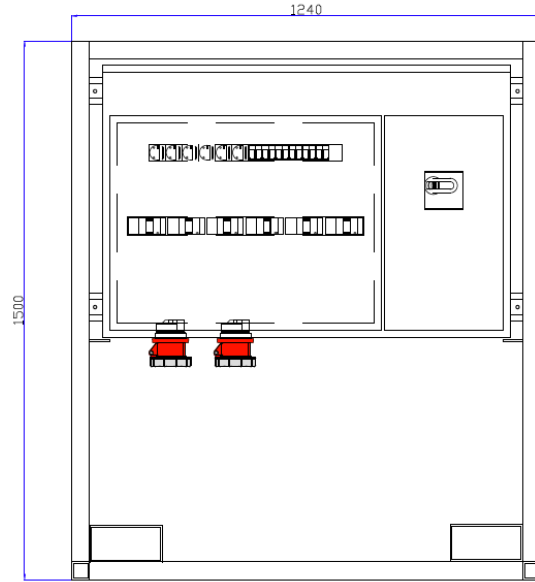

NOTE:
PANEL SHOWN L/H DOOR REMOVED

Product Socket Configuration

Inlet	Phase	Protection	Earth Leakage	IP Rating
630A	3	MCCB Hardwired	n/a	67
Outgoing	Phase	Protection	Quantity	IP Rating
400A	3	MCCB-ADJ ELR	2	67
200A	3	MCCB-ADJ ELR	2	67
125A	3	MCCB-ADJ ELR	2	67

Other Features and Mechanical Information

Phase Indication	Power Indication	Lifting	Frame
Yes	Yes	Lifting pockets	Yes
Enclosure	Overall IP Rating	Size (mm)	Weight (kg)
CR12 Steel Unit	67	H1500xW1240xD500	
Power Monitoring	Warranty		
	12 months		

Manufacturing Standard
IEC 61439: Part 2 etc

MD630_Version1_11/2021